



4-Bed Dual Hopper Portable Dryers

These 4-bed dryers efficiently dry 2 different materials at once for multiple applications.

Materials can be dried at two different temperatures and be fed to 2 different presses or to a single co-injection or co-extrusion process. New 7" color touch screen control is standard on all PPDII dryers.

Typical Applications

Frequent material changes, 2-shot/ 2-color presses and extruders, or convey dry material to 2 or more process machines.

Temperature Setback

This option prevents over-drying of materials.

Open Up Floor Space

Drying 2 materials with one dryer saves floor space and eliminates the cost of a second dryer.

Airflow Control

Automatic airflow control to hoppers.

Drying and Pre-Drying

Process dry material from one hopper while pre-drying material in second hopper for fast changeovers.

New 7" Color Touch Screen Control

- › -49° dew point monitor
- › 7-Day timer
- › Ethernet port
- › Dri-Link mobile app for IOS or Android



PDII with 100 lb hoppers



New Dri-Touch 7" color touch screen control


Plus

- › Includes portable cart, casters, 2 ea. vacuum takeoff boxes, 2 hoppers and 2 booster heaters
- › Warranty: 5 years on control, 3 years on valve and 1 year on non-maintenance parts

PDII with 5 & 15 lb hoppers



Specifications:

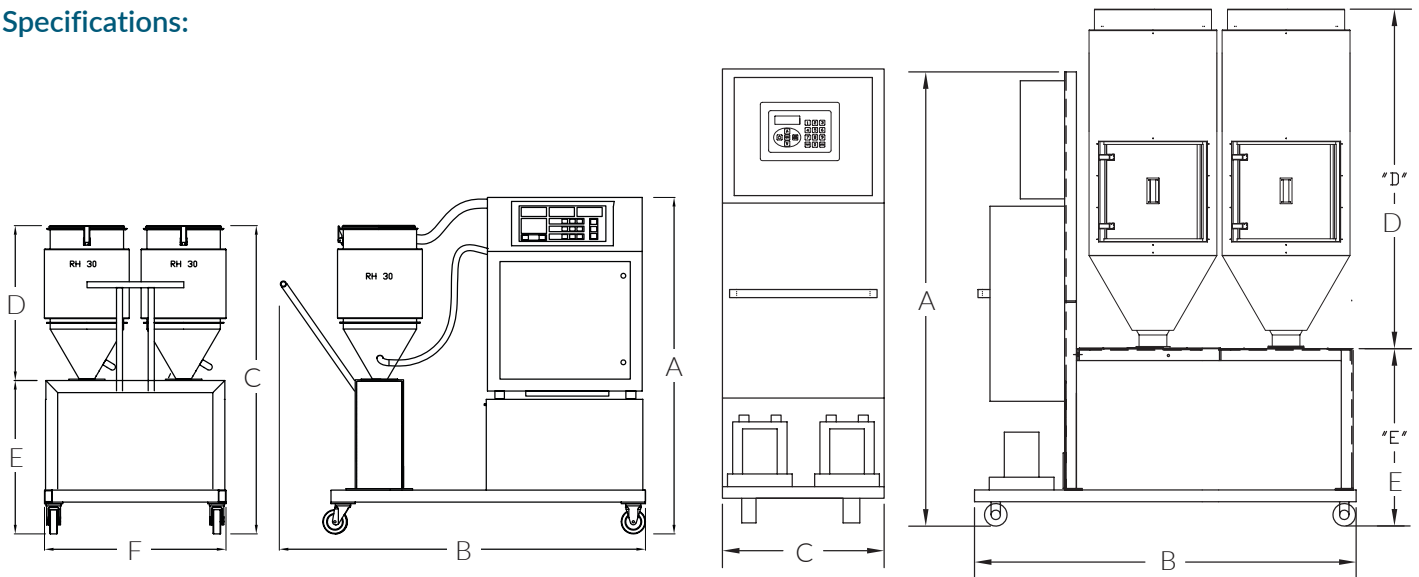

Dryer Size (CFM)	Hopper Qty (2)	A	B	C	D	E	F
25	5 lb	61"	54"	41.5"	12"	25.5"	30"
25	15 lb	61"	54"	43.5"	18"	25.5"	30"
25	30 lb	61"	54"	53.5"	28"	25.5"	30"

Dryer Size (CFM)	Hopper Qty (2)	A	B	C	D	E
46	60 lb	82"	63"	35"	40"	38"
46	100 lb	82"	63"	35"	37"	38"
57	100 lb	82"	63"	35"	37"	38"
75	150 lb	82"	63"	35"	50"	38"
100	200 lb	82"	67"	35"	47"	32"
100	300 lb	82"	67"	35"	61"	32"

Options:

Dryers:

- After Cooler
- Plasticizer trap (requires after cooler)
- Temperature setback
- General alarm
- Filter alarm
- 230V/3ph

Hoppers:

- Low material alarm
- Adjustable fill sensor (N/A on 5-30 lb hoppers)
- Drawer magnet

Closed loop machine loaders:

PD 1-8 dryers, dri-shot loader, standard, (bag filter with blowback, DS-1 receiver)

Second receiver for conveyance to 2 machines

Options for closed loop machine loaders:

- Drawer magnet
- Cleanout cycle

Compressed air kopper loader:

DAC-2 w/2" Receiver

Compressed air machine loader:

DAC-1 w/2" Receiver

Options for DAC compressed air loaders:

Torpedo Magnet- 2" Receiver